



# Leave Surveillance to the Top

## ThinkTop® D30 Digital 24 VDC PNP

### Concept

The ThinkTop® D30 is designed to ensure valve control in a basic market using Alfa Laval air operated actuators such as butterfly, single and double-seat valves. It is compatible with all major PLC systems (Programmable Logic Controller) with a digital PNP interface. It is for use in food, dairy and brewery installations. ThinkTop D30 is a complementary, alternative solution to the existing range of control units.

ThinkTop D30 is the first of its kind on the market that focuses on new methods to simplify all aspects of using a basic control unit to minimise and optimise installations instead of using external solenoid valves.

### Working principle

The ThinkTop D30 is an easy-to-use plug 'n play control unit with integrated intelligence which monitors the status of the operating air pressure, identifying air leakage or failing air pressure. The integrated solenoid valve allows control of the processing valve. Mounted on top of the valve, the unit receives signals from a PLC system to control the solenoid valve and it returns the supervised air pressure signals for valve energized or de-energized to the PLC system. ThinkTop D30 has a 360 degree visual valve status indicator, which can be seen at a distance and at any angle.



### TECHNICAL DATA

#### Communication

Interface option 1 . . . . . Digital 24 VDC PNP  
 Supply voltage . . . . . 24 VDC ± 10%, 1 W

#### Sensor board

Interface . . . . . Digital  
 Feedback signal #1 . . . . . De-energized valve  
 Feedback signal #2 . . . . . Energized valve  
 Feedback signal #3 . . . . . Alarm

#### Solenoid valve

Supply voltage . . . . . 24 VDC ± 10%, 1 W  
 Air supply . . . . . 400-700 kPa (4-7 bar)  
 Type of solenoid . . . . . 3/2-ways NC  
 Number of solenoids . . . . . 1  
 Manual override . . . . . Yes  
 Push-in fittings . . . . . ø6 mm

#### Cable connection

Main cable gland entry . . . . . PG7 (ø4 - ø6.8 mm)  
 Recommended wire diameter . . . . . 0.5 mm<sup>2</sup> (AWG 20)

### PHYSICAL DATA

#### Materials

Composite parts . . . . . Black Nylon PA 6  
 Steel parts . . . . . Stainless Steel  
 Seals . . . . . Nitrile (NBR) rubber  
 Light guide . . . . . Transparent polyamide

#### Compatible valves


ARC	Yes	SBV	Yes
SRC	Yes	Koltek	Yes
Unique SSV	Yes	SMP valves	Yes
iSSV	Yes	Unique Mixproof	No
LKLA-T	Yes	Unique SSV Long stroke	No
LKLA	No	Unique SSV High pressure DN80100	No
Air/Air actuator	No	SRC Long stroke	No

#### Environment

Operating temperature . . . . . 10°C to +50°C  
 Protection class . . . . . IP66 and IP67




## Electrical connection

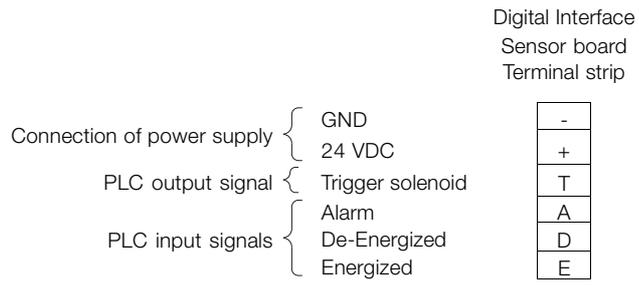

## Typical Power Consumption ThinkTop D30

Test conditions = One ThinkTop D30 connected with 1 feedback active (on) and  
1 solenoid valve active      Supply voltage 24 VDC      39 mA

## Dimensions

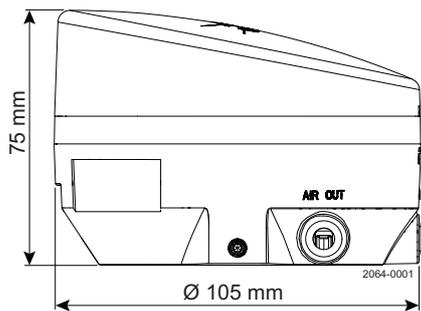

## Ordering

Please state the following when ordering:

- Push-in fittings angle-type  $\varnothing 6$  mm / 1/4" Item no. 9611995311
- Push-in fittings angle-type  $\varnothing 6$  mm /  $\varnothing 6$  mm Item no. 9611995336

Alfa Laval reserves the right to change specifications without prior notification. ALFA LAVAL is a trademark registered and owned by Alfa Laval Corporate AB.

ESE02294EN 1304

© Alfa Laval

---

**How to contact Alfa Laval**

Contact details for all countries are continually updated on our website. Please visit [www.alfalaval.com](http://www.alfalaval.com) to access the information direct.