

BEFORE





VISIT WWW.GAMAJET.COM TO WATCH A VIDEO

COMPONENTS:

GAMAJET IX

OPERATING RANGES:

PRESSURE: 50-1000 psi (4-70 bar) **FLOW:** 3-30 gpm (15-110 lpm)

TEMPERATURE: 32° to 250°F (0-121°C)

IMPACT: up to 25lbs (11.5kg) **DURABILITY: 800-1000 Hours CLEANING TIME: 2-7 Minutes**

HIGH PRESSURE VERTICAL MULTISTAGE PUMP

TEFC Standard (XP Optional)

MATERIALS: 304 Stainless Steel (316L Optional) **PUMP/MOTOR OPTIONS BASED ON RESIDUE:**

> Powder Residues: 11 gpm, 90 psi, 1ph, 115v Liquid Residues 12 gpm, 200 psi, 3ph, 230/460v Dried Residues: 19 gpm, 200 psi, 3ph, 230/460v

STARTER PANEL AND TIMER

NEMA 4X enclosed

Adjustable Timer


CUSTOMIZED TOTE COVER

Adapted to Mount Gamajet

NECESSARY FLANGES AND HOSES

STEEL TOTE

STOP WASTING TIME AND MONEY. CLEAN THE **ENTIRE INTERIOR OF YOUR TOTE, IN HOUSE.**

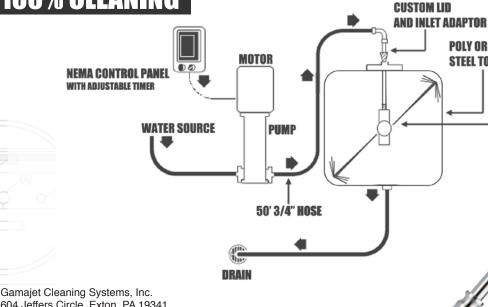

604 Jeffers Circle, Exton, PA 19341 Phone: 610.408.9940

Toll Free: 1.877.Gamajet Sales@Gamajet.com

©2011 Gamajet Cleaning Systems, Inc.

